



CHANGING BUTTON CONFIGURATION

To Change button settings Tap **Edit** on the Button Page

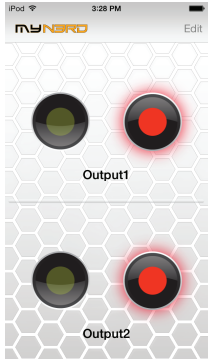


2 To switch Output 1 to Momentary Tap the Momentary On/Off button. Tap **Done.**

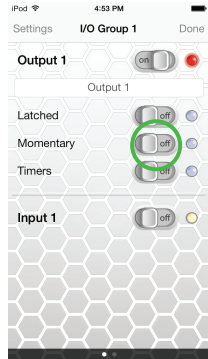


3 Button page with Momentary for Output 1 and Latched for Output 2



4 To switch Output 1 to Timers Tap the **Timers On/Off** button. Tap **Done.**

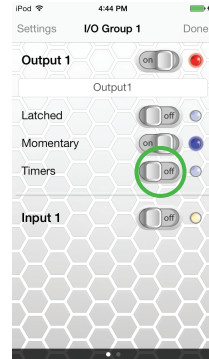

5 Set the timer by swiping up and down on hour/min/sec. Tap **Save** when done

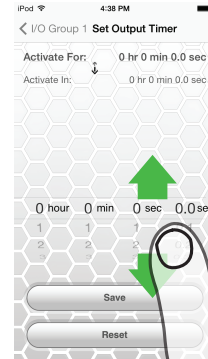

Button page with Timer for Output 1, and Latched for Output 2




To edit Output 2 swipe left from the Button Settings page




CHANGING INPUTS



Tap Output 2 On/Off to disable or enable Output 2. Tap Done.

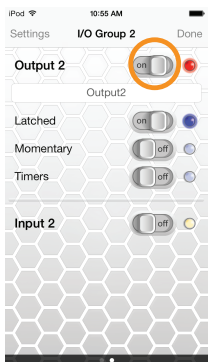

To change Inputs tap **Edit** from the Button page

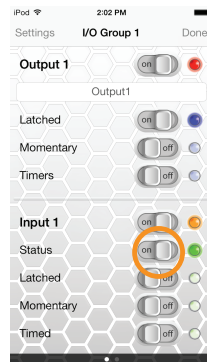

Status Input indicates the state of a switch/sensor (on/off) For example a magnetic switch could be used to indicate the status of a garage door (open or closed).

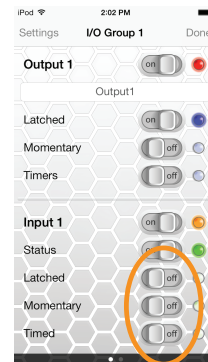

A physical switch, (like a pushbutton switch) can be setup to act as a momentary input, latched input, or timed input for My N3RD. When the physical switch is thrown the N3RD will respond accordingly based on how the input settings are configured.

INPUTS

